





Key Features

Amazing color accuracy | Smart design | Enhanced sound



Product Description


The ViewSonic® LightStream™ PJD5553LWS price-performance short throw projector features 3,200 lumens, native WXGA 1280 x 800 resolution, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment, while SonicExpert™, ViewSonic’s proprietary sound enhancement technology, powers a 2W speaker to deliver incredibly clear and audible sound. A short throw lens with a 0.49 throw ratio offers large projection images for smaller rooms. The PJD5553LWS also features HDMI and VGA connectivity, and a RS232 control port. An energy-saving DynamicEco® feature reduces power consumption by up to 70%, and extends the lamp life up to 10,000 hours**. With advanced audiovisual features, flexible connectivity options, and an affordable price, the PJD5553LWS is ideal for use in education and small business environments.

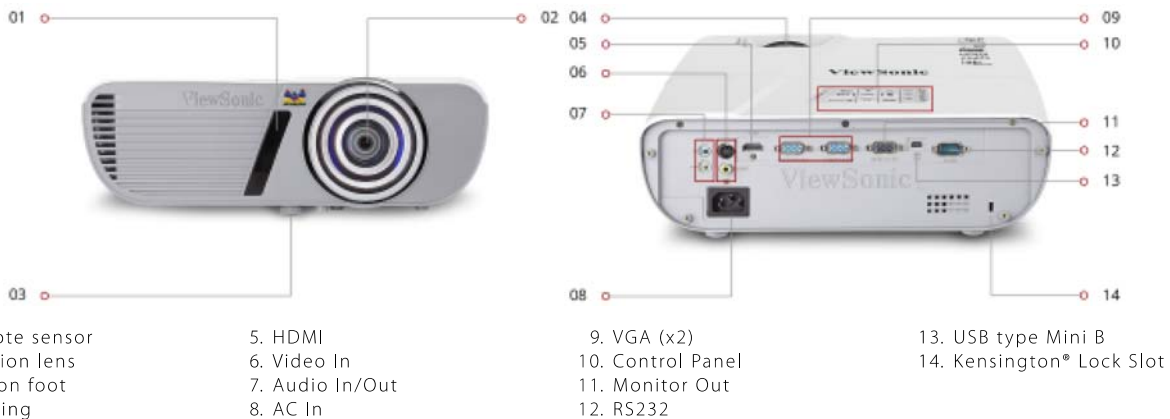

1280 x 800
RESOLUTION



3,200
LUMENS



0.49
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Throw Distance:	1.74 – 8.66 ft. / 0.53 – 2.64 m
Throw Ratio:	0.49
Type:	DLP
Lens:	fixed zoom / manual optical focus
Keystone:	Manual vertical digital keystone correction ($\pm 40^\circ$)
Light Source (watt):	190
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	10000
Brightness (ANSI Lumens):	3,200
Color Depth:	30 bits, 1.07B Color (10+10+10)
Resolution:	1280 x 800
Dynamic Contrast Ratio:	20000:1
Aspect Ratio:	16:10
Resolution Type:	WXGA
Display Size (in.):	50 - 250 in. / 1.27 - 6.35 m

Video Signal:

Frequency Horizontal:	15–102KHz
Frequency Vertical:	23–120Hz

Compatibility:

PC Resolution (max):	1920 x 1080
Mac® Resolution (max):	1920 x 1080

Connector:

3.5mm Audio Out(1), 3.5mm Audio In(1), HDMI 1.4(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1)

Audio:

Internal Speakers:	2W
--------------------	----

Power:

Voltage:	100~240VAC (Auto Switching), 50-60Hz (universal)
Consumption (max):	265W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information(See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0-40° C)
Humidity (non-condensing):	10-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Gross (lbs):	8.4
--------------	-----

Weight (metric):

Net Without Stand (kg):	2.5
Gross (kg):	3.8

Dimensions (metric) (WxHxD):

Packaging (mm):	408 x 225 x 345
Physical Without Stand (mm):	316 x 228 x 103.7

Dimensions (imperial) (WxHxD):

Packaging (in.):	16.0 x 8.85 x 13.58
Physical Without Stand (in.):	12.44 x 8.98 x 4.08

General:

Regulations: CB, TUV-GS, UL/cUL, FCC (including ICES-003), CE, C-Tick, Mexico Energy, EAC, UkrSEPRO/EMC DOC, UL COC, TUV-S, PSB, KCC, KC, SASO, CCC, BIS, WEEE, RoHS, REACH, SVHC, ErP

PACKAGE CONTENTS: PJD5553LWS projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907808117

Accessories:**Awards:**