


Key Features

- SuperColor: Amazing Color Accuracy | 4,000 Lumen
- Brightness | Network Capable | Energy-efficient
- SuperEco™



Product Description

The ViewSonic® PG705HD 1080p projector features 4,000 lumens, Full HD 1920x1080 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. Equipped with Crestron® LAN controller, this projector makes it easy for IT admin to remotely control and manage multiple projectors from their workstations. With a shorter throw ratio, 1.2x optical zoom, vertical keystone, and extensive connectivity, the PG705HD provides flexible and quick set-up. What's more, an energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 15,000 hours. The PG705HD is the ideal projector for both high definition presentations and vibrant multimedia entertainment.

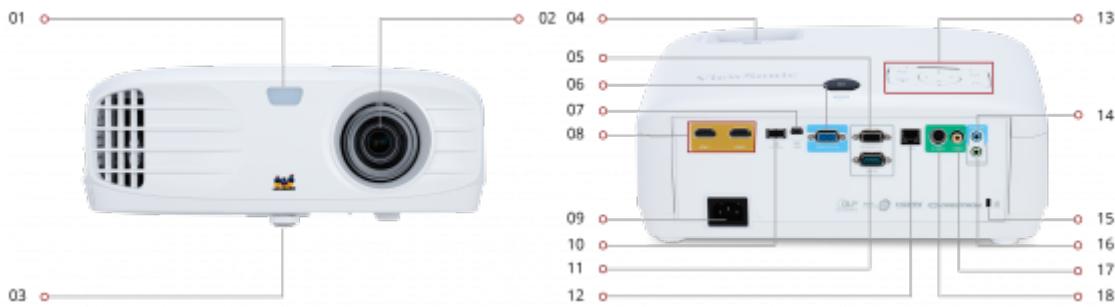

1. IR remote sensor
2. Projection lens
3. Elevation foot
4. Focus / zoom rings
5. Monitor Out
6. VGA
7. USB type Mini B
8. HDMI (x2)
9. AC In
10. USB 2.0 Type A (powered)
11. RS232
12. LAN
13. Control Panel
14. Audio In
15. Kensington® Lock
16. Audio Out
17. Video In
18. S-Video In

1920 x 1080
RESOLUTION

4,000
LUMENS

1.5 - 1.8
THROW
RATIO

Contact Sales

call: 888.881.8781
email: salesinfo@viewsonic.com
visit: viewsonic.com

Display:

Type:	DLP
Resolution Type:	1080p
Resolution:	1920 x 1080
Brightness (ANSI Lumens):	4,000
Throw Distance:	3.2 - 38.4 ft / 1 - 11.7 m
Throw Ratio:	1.5 - 1.8
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m

Keystone:	Vertical ($\pm 40^\circ$)
Lens:	1.2x Manual optical zoom / manual optical focus
Light Source (watt):	240
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	12,000:1
Aspect Ratio:	16:9

Video Signal:

Frequency Horizontal:	15k~102kHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	1920 x 1200
Mac® Resolution (max):	1920 x 1200

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI(2), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1)

Audio:

Internal Speakers:	10W
--------------------	-----

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	350W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
--------------------	---

On Screen Display: Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial): Copyright © ViewSonic Corporation 2000-2018. All rights reserved. (01/11/2018 09:44 AM PST)

Net (lbs):	8.1
Gross (lbs):	11.0

Weight (metric):

Net (kg):	3.7
Gross (kg):	5.0

Dimensions (imperial) (WxHxD):

Packaging (in.):	16.4 x 8.2 x 13.2
Physical (in.):	13.1 x 5.3 x 10.3

Dimensions (metric) (WxHxD):

Packaging (mm):	417.0 x 207.0 x 336.0
Physical (mm):	332.0 x 135.0 x 261.0

General:

Regulations: FCC, cTUVus

PACKAGE CONTENTS: PG705HD projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907929515

Accessories:

PGD-350, PJ-SCW-1001W, PJ-WMK-006, PM-FCP, RLC-117