

Pro8530HDL



LightStream Pro Series: Bright & Versatile for Pro Installations

1920 x 1080 Resolution, 5,200 Lumens, 1.07~1.71:1 Throw Ratio




Key Features:


- Full HD 1080p resolution
- 5,200 lumen brightness
- Vertical lens shift with centered lens
- Secure MHL/HDMI port, and optional HDBaseT adapter
- 4 HDMI ports for flexible connectivity

Delivering stunning 1080p resolution and 5200 lumens of brightness, the ViewSonic® LightStream® Pro8530HDL is the ideal projector for professional installations, large venues, and business and education environments. With its 1.6x optical zoom, centered lens, vertical lens shift, and HV keystoneing, the Pro8530HDL provides extreme flexibility even in the most challenging installations. The Pro8530HDL boasts a sleek top cover design for quick lamp and accessory access, while an intuitive PortAll™ compartment accommodates additional accessories such as an HDBaseT receiver, wireless streaming device, or PC stick. The cable management hood hides unsightly cables, and a 4-in-1 power button serves as a central point for LED notifications. Moreover, four HDMI ports and additional audio and video ports allow for extensive connectivity to handle multiple devices without the need to switch cables. Powered by SuperColor™ technology for amazing images, and SonicExpert™ technology for incredibly clear sound, the Pro8530HDL delivers a professional audiovisual performance.

Dimensions: 19.55 x 12.45 x 5.5 in. / 496.5 x 316.2 x 139.8 mm

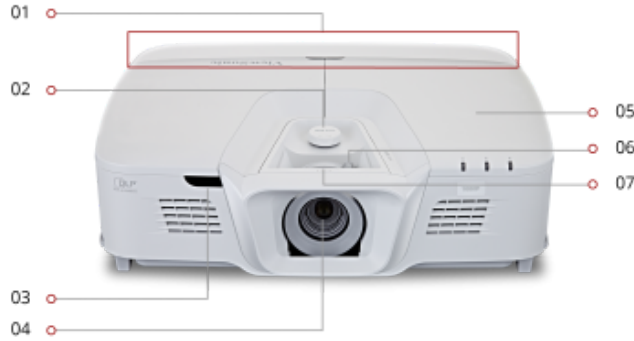

- 01. Cable Management
- 02. Vertical Lens Shift
- 03. IR Remote Sensor
- 04. Projection Lens
- 05. PortAll™ (HDMI/MHL)
- 06. Zoom ring
- 07. Focus ring

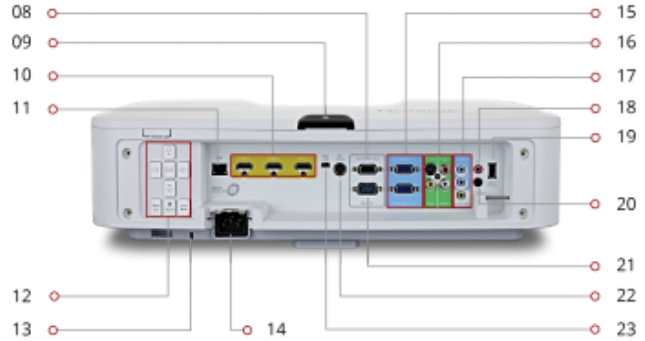

- 08. Monitor Out
- 09. Power Switch
- 10. HDMI (x3)
- 11. LAN
- 12. Menu Controls
- 13. Kensington® Lock Slot
- 14. AC In
- 15. VGA (x2)
- 16. Audio/Video In
- 17. Audio In/Out
- 18. IR Passthrough
- 19. USB
- 20. 12V DC Trigger
- 21. RS232
- 22. 3D VESA
- 23. USB type Mini B

Full Specifications

Display

Throw Distance:	2.3 - 37.3 ft. / 0.71 - 11.36 m
Throw Ratio:	1.07~1.71:1
Type:	DLP
Lens:	1.6x Manual optical zoom / manual optical focus
Keystone:	Vertical (± 30°) / Horizontal (± 30°)
Light Source (watt):	370
Light Source Life, Normal (hours):	2000
Light Source Life, Dynamic Eco-Mode (hours):	2500
Brightness (ANSI Lumens):	5,200
Color Depth:	30 bits, 1.07B Color (10+10+10)
Resolution:	1920 x 1080
Aspect Ratio:	16:9
Resolution Type:	1080p
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m

Video Signal

Frequency Horizontal:	15–100KHz
Frequency Vertical:	24–120Hz

Compatibility

PC Resolution (max):	Up to 1920x1080
Mac® Resolution (max):	Up to 1920x1080 (may require MAC adapter)

Connector

USB 2.0 Type A:	1
USB 2.0 Type B:	1
Ethernet LAN (RJ45):	1
3.5mm Audio Out:	1
3.5mm Audio In:	2
HDMI 1.4:	3
VGA In:	1
VGA Out:	1
S-Video In:	1
Micro USB:	1

Audio

Internal Speakers:	10W (x2)
--------------------	----------

Power

Voltage:	100~240VAC (Auto Switching), 50-60Hz (universal)
Consumption (max):	570W
Stand-by:	<0.5W

Controls

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information

Operating Conditions

Temperature:	32-104° F (0–40° C)
Humidity (non-condensing):	0-90%

Additional Hardware

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial)

Net (lbs):	13.89
Gross (lbs):	23.81

Weight (metric)

Net (kg):	6.3
Gross (kg):	10.8

Dimensions (metric) (WxHxD)

Packaging (mm):	577 x 537 x 260
Physical (mm):	496.5 x 316.2 x 139.8

Dimensions (imperial) (WxHxD)

Packaging (in.):	22.72 x 21.14 x 10.24
Physical (in.):	19.55 x 12.45 x 5.5

General

Regulations:	Mexico Energy test/Registration, EAC, TUV-S Mark (Argentina), India BIS, FCC, CE, EMC, CB, CCC, RoHS, REACH, SVHC, WEEE, ErP, Mexico NOM, cTUVus, PSB, RCM, CECP
--------------	--

PACKAGE CONTENTS:

Pro8530HDL projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide), Cable management cover

Warranty:

Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service™

Recycle/Disposal:

Please dispose of in accordance with local, state or federal laws.

UPC:

766907830019

Accessories

Products:	PGD-350, PJ-WMK-006, VIEWSYNC3, WPG-300
-----------	---