

# LightStream™ XGA 1024x768 Short Throw Projector

True-to-Life Color in Any Light\*

**PJD5353LS**



The ViewSonic® LightStream™ PJD5353LS value projector lets you experience true-to-life color in any lighting condition. Whether for classrooms, meeting rooms, or home theaters, ViewSonic LightStream projectors bring lesson plans, presentations, and movies to life with vivid colors and crisp images. Equipped with SuperColor™ technology and a high-brightness output, this projector strikes a perfect balance of color and light to deliver the ultimate in color accuracy without compromise. In addition to incredible screen performance, the PJD5353LS projector features a smart and intuitive design that includes a sleek white chassis, a programmable remote control, an easy-access top lamp door, and an optional cable management hood for reduced clutter. A short throw lens with a 0.6 throw ratio projects large images in small rooms. Delivering amazing lifelike color at an affordable price, ViewSonic's LightStream PJD5 series of projectors are the ideal multipurpose projection solution for any room.

**Key Features:**

Best in class color accuracy

Smart design

Enhanced sound

**Designed for:**

Education

Business


Home

# LightStream™ XGA 1024x768 Short Throw Projector



**PJD5353LS**

Projection Distance		Screen Size (4:3 Diagonal)	
Inches	Meters	Inches	Meters
15	0.4	30	0.8
19	0.5	40	1.0
24	0.6	50	1.3
29	0.74	60	1.5
34	0.86	70	1.8
39	0.99	80	2.0
44	1.11	90	2.3
49	1.23	100	2.5
58	1.48	120	3.0
73	1.9	150	3.8
97	2.5	200	5.1
122	3.1	250	6.4
146	3.7	300	7.6

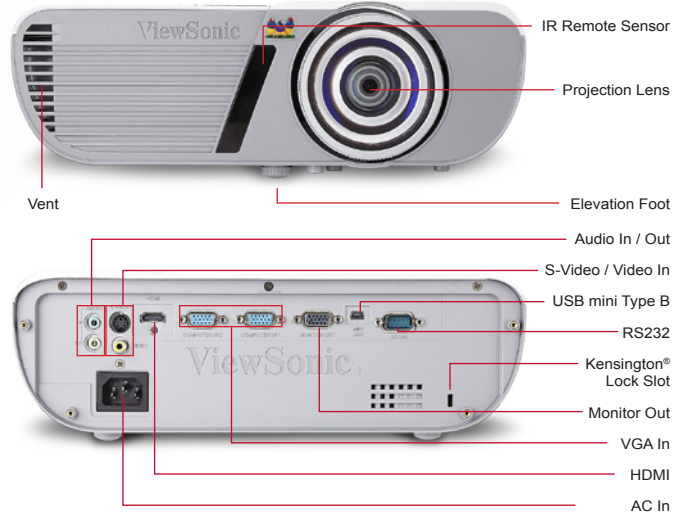

Focus Ring  
Control Panel

IR Remote Sensor  
Projection Lens  
Vent  
Elevation Foot  
Audio In / Out  
S-Video / Video In  
USB mini Type B  
RS232  
Kensington® Lock Slot  
Monitor Out  
VGA In  
HDMI  
AC In

## Specifications

<b>DISPLAY</b>	Type	0.55" Digital Micromirror Device (DLP™)
	Resolution	1024 x 768 (native)
	Lens	Fixed zoom / manual optical focus
	Keystone	Manual vertical digital keystone correction (± 40°)
	Size	50 – 250 in. / 1.27 – 6.35 m (diagonal)
	Throw Distance	2.0 – 10.12 ft. / 0.61 – 3.09 m
	Throw Ratio	0.61:1
	Lamp	190 watt
	Light Life	5000 / 10000 hours** (Normal / Eco-mode)
	Brightness	3200 lm
Contrast Ratio	20,000:1 (DynamicEco Mode)	
Aspect Ratio	4:3 (native)	
Color Depth	30 bits, 1.07B Color (10+10+10)	
<b>INPUT SIGNAL</b>	Computer and Video	NTSC M(3.58MHz), 4.43MHz, PAL (B, D, G, H, I M, N, 60), SECAM (B, D, G, K, K1, L), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p
	Frequency	Fh: 15–102KHz, Fv: 23–120Hz
<b>COMPATIBILITY</b>	PC	Up to 1920x1080
	Mac®	Up to 1920x1080 (may require MAC adapter)
<b>CONNECTOR</b>	Digital Input	HDMI 1.4
	RGB Input	15-pin mini D-Sub (x2)
	RGB Output	15-pin mini D-Sub
	Composite Input	RCA jack
	S-Video	4-pin mini-DIN
	Audio Input	3.5mm mini jack
	Audio Output	3.5mm mini jack
	USB Control	Mini type B (mouse control and maintenance) RS232

<b>AUDIO</b>	Speaker	2W (x1)
<b>NOISE LEVEL</b>	Normal / Eco-mode	32 dB / 27 dB
<b>POWER</b>	Voltage	100–240VAC (Auto Switching), 50-60Hz (universal)
	Consumption	265W (max) / <0.5W (stand-by mode)
<b>CONTROLS</b>	Basic	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
	OSD	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information (See user guide for full OSD functionality)
<b>OPERATING CONDITIONS</b>	Temperature	32–104° F (0–40° C)
	Humidity	10–90% (non-condensing)
	Altitude	0–6,000 ft (1,800m), operational up to 10,000 ft (3,048m)
<b>DIMENSIONS (W x H x D)</b>	Physical	12.44 x 8.98 x 4.08 in. / 316 x 228 x 103.7 mm
	Packaging	16.0 x 8.85 x 13.58 in. / 408 x 225 x 345 mm
<b>WEIGHT</b>	Net	5.5 lb. / 2.5 kg
	Gross	8.4 lb. / 3.8 kg
<b>REGULATIONS</b>	CB, TUV-GS, UL/cUL, FCC (including ICES-003), CE, C-Tick, Mexico Energy, EAC, UkrSEPRO/EMC DOC, UL COC, TUV-S, PSB, KCC, KC, SASO, CCC, BIS, WEEE, RoHS, REACH, SVHC, ErP	
<b>WARRANTY</b>	3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service***	

## Optional Accessories

Replacement Lamp .....	RLC-092
Wireless Presentation Gateway .....	WPG-370
Wireless Presentation Gateway Dongle .....	WPG-300†
3D Active Shutter Glasses.....	PGD-350
Short Throw Mount.....	WMK-005
Cable Management.....	PJ-CM-002
Carrying Case.....	PJ-CASE-008
Extended Warranty.....	PRJ-EW-07-02

## What's in the box?

PJD5353LS projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



\*Based on normal variance in office/classroom/home lighting conditions. \*\*Lamp life may vary based on actual usage and other factors. \*\*\*One year Express Exchange® service requires product registration. †Requires external USB power source (not included). Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies, DLP® and DLP logo are registered trademarks of Texas Instruments. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Copyright © 2016 ViewSonic Corporation. All rights reserved. [18634-00B-06/16]

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

www.viewsonic.com